
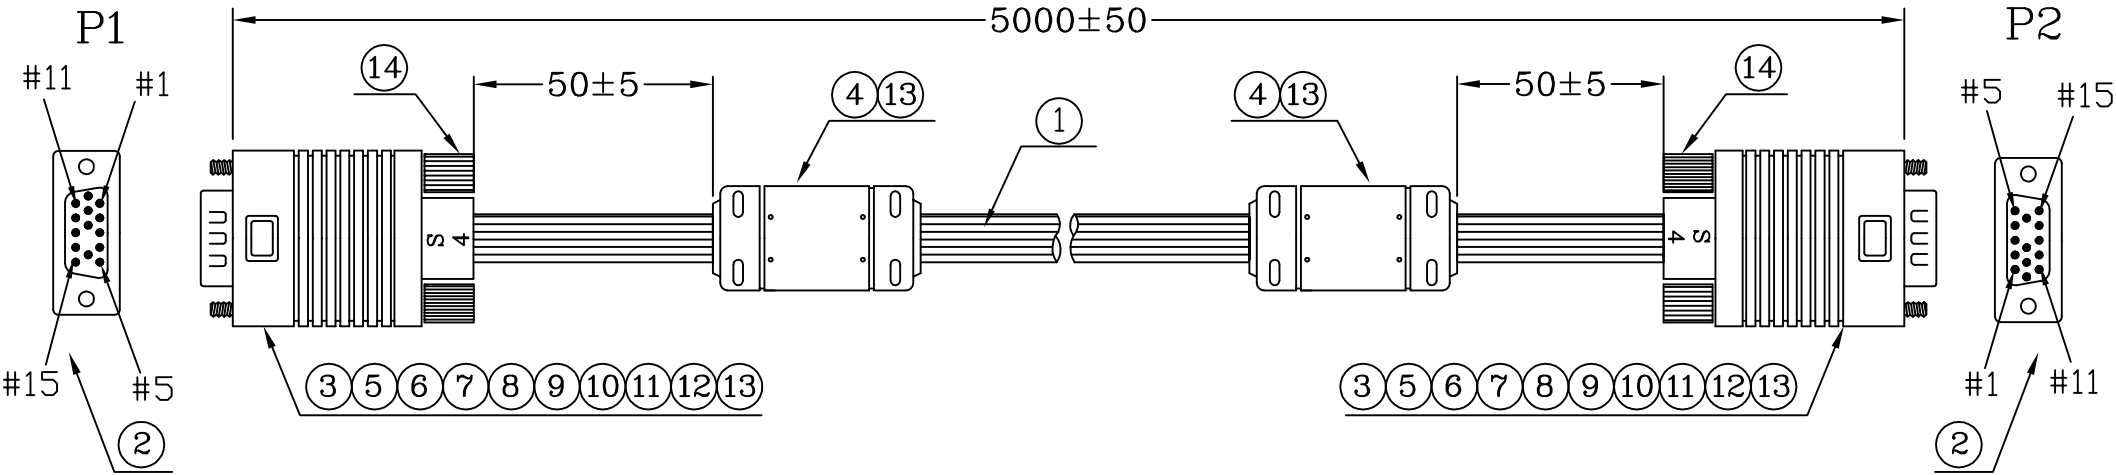


DESCRIPTION CONTROL			
REV	DESC	DATE	APP



*	390	CARTON:46*30*25CM	1/50	PCS
*	390	PE BAG:30*28*0.08MM	1/50	PCS
*	390	PE BAG:7*10*0.06MM	1	PCS
14	370	SRW-Q39.6/BK10/Z2	4	PCS
13	370	PVC-BK10/50	70.0	G
12	370	SOL-WIRE-63/37-1.2	4.0	G
11	370	TAPE:W:12MM;L:40MM	2	PCS
10	370	HI TEAMP TAPE:W:24MM;L:70MM	2	PCS
9	370	FOIL-CU-31*55MM	2	PCS
8	370	PE-5321	8.0	G
7	210	TUBE-HT-ø3.0*8MM	6	PCS
6	210	TUBE-HT-ø2.0*6MM	6	PCS
5	210	TUBE-HT-ø1.0*12MM	6	PCS
4	370	CORE:17.5*27*9.5MM	2	PCS
3	370	SOL-WIRE-63/37-1.0	0.75	G
2	220	CDS-H15P<BK>/-9	2	PCS
1	210	28/28-3C/8+A+D+B-BK10 -5.0M-8.0U2919 <齒狀>	1	PCS
NO	PART NO.	DESCRIPTION	QTY	UNIT

NOTE:
1.CABLE COLOR : BLACK 10#. <齒狀>
2.CONNECTOR HD15P : NO.9PIN NO CONNECTION.
3.MOLDING COLOR : BLACK 10#.

INNER MOLDING				
OUTER MOLDING		AHD1515	HT005	
		Y-S ELECTRONIC CO.,LTD. SHENG DONG FACTORY		
		ITEM: MA1515100001189		REV R
DRAW,BY: 周琦		SCALE: NONE		DATE: 2004.8.2
CHECK,BY:		CUSTOMER: C501		
APP,BY:		CUSTOMER P/N: SK-0671-5M		
ALL DIMENSIONS IN mm				

P1	PIN ASSIGNMENT		P2
1	COAX-RED-IN	1	1
6	COAX-RED-GND	6	6
2	COAX-GREEN-IN	2	2
7	COAX-GREEN-GND	7	7
3	COAX-BLUE-IN	3	3
8	COAX-BLUE-GND	8	8
4		4	4
5		5	5
10		10	10
11		11	11
12		12	12
13		13	13
14		14	14
15		15	15
S		S	S